

A1

10/30/97

Submitted herewith for filing is the patent application of

JOSHUA LEWIS COLMAN ET AL

FLUID ANALYZER WITH TUBE CONNECTOR VERIFIER

Enclosed are:

- ☒ 3 sheets of informal drawings.
- ☒ An assignment of the invention to SPEGAS INDUSTRIES LTD.
- ☐ A certified copy of a application.
- ☐ An associate power of attorney.
- ☒ A verified statement to establish small entity status under 37 CFR 1.9 and 37 CFR 1.27.
- ☐ Other -

The filing fee has been calculated as shown below:

FOR:	(Col.1)	(Col.2)
	NO. FILED	NO. EXTRA
BASIC FEE		
TOTAL CLAIMS	50-20=	30
INDEP CLAIMS	5- 3=	2
Recordal of Assignment		40

If the difference in Col.1 is less than zero, enter "0" in Col.2

SMALL ENTITY	
RATE	FEE
	\$ 395
30x11=	\$ 330
2x41	\$ 82
	\$ 40
TOTAL	\$ 847

OR  
OR  
OR  
OR  
OR  
OR

OTHER THAN A SMALL ENTITY	
RATE	FEE
	\$ 770
x22=	\$
x80=	\$
=	\$
TOTAL	\$

- ☒ Please charge my Deposit Account No. 06-2140 in the amount of \$ 847. A duplicate copy of this sheet is enclosed.
- ☐ A check in the amount of \$ to cover the filing fee is enclosed.
- ☒ The Commissioner is hereby authorized to charge payment of the following fees associated with this communication or credit any overpayment to Deposit Account No. 06-2140. A duplicate copy of this sheet is enclosed.
  - ☒ Any additional filing fees required under 37 CFR 1.16.
  - ☒ Any patent application processing fees under 37 CFR 1.17.
- ☒ The Commissioner is hereby authorized to charge payment of the following fees during the pendency of this application or credit any overpayment to Deposit Account No. 06-2140. A duplicate copy of this sheet is enclosed.
  - ☒ Any patent application processing fees under 37 CFR 1.17.
  - ☐ The issue fee set in 37 CFR 1.18 at or before mailing of the Notice of allowance, pursuant to 37 CFR 1.311(b).
  - ☒ Any filing fees under 37 CFR 1.16 for presentation of extra claims.

Respectfully,

Mark M. Friedman  
Reg. No. 33,883

Mark M. Friedman  
DR. MARK FRIEDMAN & CO.  
c/o Robert Sheinbein  
2940 Birchtree Lane  
Silver Spring, Maryland 20906

## SMALL BUSINESS CONCERN - NEW APPLICATION

Attorney Docket No.: 830/17

## IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In RE Application of: JOSHUA L. COLMAN ET AL.

Filed Concurrently Herewith

For: FLUID ANALYZER WITH TUBE CONNECTOR VERIFIER

VERIFIED STATEMENT UNDER 37 CFR 1.27  
CLAIMING STATUS AS A SMALL ENTITY

To The Commissioner of Patents and Trademarks:

I hereby declare that:

I am the owner of, or an official empowered to act on behalf of, the small business concern identified below:

Name of Concern: SPEGAS INDUSTRIES LTD.

Address: P.O. BOX 45025, JERUSALEM 91450, ISRAEL

The small business concern identified above, together with its affiliates, employs fewer than 500 persons and qualifies as a small business concern as defined in 37 CFR 1.9(d) for purposes of paying reduced fees under 35 USC § 41(a) and § 41(b) to the Patent and Trademark Office with regard to the above-entitled invention described in the specification filed herewith.

Rights under contract or law have been conveyed to and remain with the small business concern identified above with regard to the above entitled invention.

If the rights held by the small business concern are not exclusive, each other party having rights to the invention is listed below, and no rights to the invention are held by any party who could not qualify as a small entity under 37 CFR 1.9(f), namely any person who could not be classified as an independent inventor under 37 CFR 1.9(c) if that person had made the invention, or any concern which would not qualify as a small business concern under 37 CFR 1.9(d) or a nonprofit organization under 37 CFR 1.9(e).

Full Name (Party 1): NONE

Address:

Status: ☐ Individual ☐ Small Business Concern ☐ Nonprofit Organization

Full Name (Party 2):

Address:

Status: ☐ Individual ☐ Small Business Concern ☐ Nonprofit Organization

I acknowledge the duty under 37 CFR 1.28(b) to file, in this application, notification of any change in status resulting in loss of entitlement to small entity status prior to paying, or at the time of paying, the issue fee due after the date on which status as a small entity is no longer appropriate.

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code, and that such willful false statements may jeopardize the validity of the application and any patent issuing thereon.

x George Jeriv  
Name of Person Signingy *George Jeriv*  
Signaturex 14. 10. 97  
Date

Capacity of Person Signing: x Managing Director

Address of Person Signing: x PO BOX 45025 JERUSALEM ISRAEL

## INDEPENDENT INVENTOR - NEW APPLICATION

Attorney Docket No.: 830/17IN THE UNITED STATES PATENT AND TRADEMARK OFFICEIn RE Application of: JOSHUA L. COLMAN ET AL.

Filed Concurrently Herewith

For: FLUID ANALYZER WITH TUBE CONNECTOR VERIFIERVERIFIED STATEMENT UNDER 37 CFR 1.27  
CLAIMING STATUS AS A SMALL ENTITY

To The Commissioner of Patents and Trademarks:

As a below named inventor, I hereby declare that:

I qualify as an independent inventor as defined in 37 CFR 1.9(c) for purposes of paying reduced fees under 35 USC § 41(a) and § 41(b) to the Patent and Trademark Office with regard to the above-entitled invention described in the specification filed herewith.

I have not assigned, granted, conveyed or licensed and am under no obligation under contract or law to assign, grant, convey or license, any rights in the invention to any party who could not qualify as a small entity under 37 CFR 1.9(f), namely any person who could not be classified as an independent inventor under 37 CFR 1.9(c) if that person had made the invention, or any concern which would not qualify as a small business concern under 37 CFR 1.9(d) or a nonprofit organization under 37 CFR 1.9(e).

Each party, if any, who could qualify as a small entity under 37 CFR 1.9(f) and to whom I have assigned, granted, conveyed or licensed or am under an obligation under contract or law to assign, grant, convey or license, any rights in the invention is listed below:

Full Name (Party 1): NONE

Address: \_\_\_\_\_

Status: ☐ Individual ☐ Small Business Concern ☐ Nonprofit Organization

Full Name (Party 2): \_\_\_\_\_

Address: \_\_\_\_\_


Status: ☐ Individual ☐ Small Business Concern ☐ Nonprofit Organization

I acknowledge the duty under 37 CFR 1.28(b) to file, in this application, notification of any change in status resulting in loss of entitlement to small entity status prior to paying, or at the time of paying, the issue fee due after the date on which status as a small entity is no longer appropriate.


I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code, and that such willful false statements may jeopardize the validity of the application and any patent issuing thereon.

JOSHUA L. COLMAN

Name of Inventor 1

X   
Signature of InventorDate: X 14/10/97AMNON MENACHEN

Name of Inventor 2

X   
Signature of Inventor

Name of Inventor 3

Signature of Inventor

## APPLICATION FOR PATENT

### FLUID ANALYZER WITH TUBE CONNECTOR VERIFIER

#### 5 FIELD AND BACKGROUND OF THE INVENTION

The present invention concerns a system for verifying the presence and identity of a tube connector connected to an instrument and, more particularly, an electro-optical method and device to determine whether a tube assembly has been connected to a fluid analyzing instrument and, if so, whether it belongs to a certain class of such tube assemblies .

10 The particular application for which the present invention will be described is that of a capnograph, which is an instrument for analyzing exhaled air. A capnograph is used by sampling air exhaled by a patient, by means of a small tube, also called sampling line, one end of which is, for example, connected to an air passageway of a respirator or to a cannula attached to the patient's nostrils; the tube is connected at its other end, through a special  
15 connector, to the analyzing instrument. The tube assembly, especially of the type that is the subject of the present invention, often includes a filter or other means for removing moisture and mucus; alternatively, there may be a filter built into the capnograph or supplied separately, to be connected to the tube. The complete tube assembly, including the filter and the connector, is usually of the disposable type and is replaced for every patient tested.

20 A typical connector, also referred to as a luer, is depicted in Figure 1, which shows the two members, one male and one female, separated; each member is shown in an isometric view and in a longitudinal section. The shape of the connector, which is essentially round, as depicted in Fig. 1, is standardized throughout the industry, so that tube assemblies of various manufacturers may be interchangeably used with any analyzing instrument. Thus, the  
25 manufacturer of a particular type of analyzing instrument has generally no control over which type of tube and filter will be used with his instrument in practice. For reasons of optimal functioning of the instrument, as well as for commercial reasons, the manufacturer of an

analyzing instrument may want to exert such control. In particular, he may want to stipulate that only a certain class of tube assemblies be connected to, and used with, his instrument. Such a class may, for example, consist of tube assemblies that include a filter, in general, or such that are manufactured directly by him or to his specifications or under his supervision or  
5 license, in particular.

One way to enforce this stipulation would be to use some unique interlocking key arrangement between the connector and the instrument. Such an arrangement would, however, be incompatible with the standard connector shape being used throughout and would require of the operator, when connecting and disconnecting the tube, different motions  
10 than those to which he is used.

Another way of enforcing the stipulation is to have a system by which the correct tube assembly would be identified as such by the instrument, whereupon its operation would be enabled, and to disable the instrument otherwise. A side benefit of such an arrangement would be that the instrument would be prevented from operation also when no tube is  
15 connected at all or when even a correct tube is improperly connected, thus avoiding damage to sensitive parts of the instrument and also causing incorrect readings. Yet another purpose may be served by such a system, namely identifying the tube assembly as belonging to one of a number of classes and informing the instrument of the particular identity detected, so as to enable it to automatically operate differently for the different classes.

20 There are known several types of means for effecting such identification. One type is electro-mechanical, whereby the connector would have one or more protrusions or notches at its end, which would engage appropriately placed levers that activate micro-switches. This type of means is impractical, because of the small dimensions of the connector pair and the little space available at the surrounding instrument panel. Another type of means is electrical,  
25 whereby the connector would have one or more conductive paths at its end, which would complete the circuit between appropriately placed contacts. This type of means is impractical, because of the dampness prevalent in the immediate surroundings.

There is thus a widely recognized need for, and it would be highly advantageous to have, a fluid analysis system that includes the capability of determining that a tube assembly has been properly connected to the analyzing instrument and that the tube is of a certain class. Such a capability must be compatible with the standard shape of connectors being used, as well as with the medical environment, must be reliable and must preferably be inexpensive - at least with regard to the fabrication of the disposable tube assembly.

#### SUMMARY OF THE INVENTION

The present invention successfully addresses the aforementioned needs by providing an air analysis system in which the presence and classification of a connected tube assembly can be conveniently and reliably detected.

The present invention discloses a novel modification of an air analysis system, whereby the presence of a tube connector of an acceptable class and its proper placement with respect to a mating connector, is ascertained by making the end of the connector appropriately reflective and by shining light thereon and detecting the light reflected thereof.

More specifically, the system of the present invention provides for a specularly reflective surface on the end of the tube connector of the acceptable class and for a pair of optical fibers mounted in the mating connector so that when, and only when, that tube connector is correctly positioned, a sufficient portion of light emitted from the end of one fiber is reflected into the end of the other fiber. The emitted light originates from a pulsed LED, optically coupled to the first fiber. The light reflected into the other fiber is detected by means of a photo-diode connected to a circuit that includes a comparator. The latter outputs a binary signal that can be used to enable or disable essential components of the analyzing instrument.

In an alternative configuration, the end of the tube connector has a fluorescent or phosphorescent material, which can be stimulated by the light emitted from the first fiber to re-emit light of spectral characteristics different from those of the LED. A portion of the re-

emitted light is collected by the second fiber and is passed through a spectrally selective filter, then detected as in the first configuration.

According to the present invention there is provided an apparatus for analyzing fluid supplied to it through a tube and a system for verifying the proper connection of the tube

5 thereto and for classifying the tube, comprising:

an analyzing instrument within an enclosure;

a first connector attached to the tube and having an end face;

a second connector, mating with the first connector and attached to the enclosure;

a pair of optical fibers disposed inside the enclosure, a first end of each of the fibers

10 being mounted in the second connector so that, when the first connector is properly mated with the second connector, there is a clear optical path between the end face of each of the first ends of the fibers and at least one common point on the end face;

a light source optically coupled to the second end of a first fiber; and

a light detector optically coupled to the second end of the second fiber.

15 According to further features in preferred embodiments of the invention described below, the end face is essentially specularly reflective over at least an annular portion thereof, the analyzing instrument is operative only upon reception of an enabling signal and further comprises an electric circuit connected to the light detector, the circuit being configured so that only if a substantial portion of any light emitted from the first end of one of the fibers is

20 reflected by the annular portion of the end face into the first end of the other one of the fibers, will the circuit output the enabling signal to the analyzing instrument.

Preferably, the light source emits light in a narrow band of wavelengths and the apparatus further includes an optical filter, essentially transmissive of the narrow band of wavelengths and disposed in the path of the light transmitted through the second fiber. According to a

25 modification of the preferred embodiment, the reflectivity of the end face is spectrally selective and the light source emits light in a narrow band of wavelengths, or there is a spectrally selective optical filter disposed in the path of the light transmitted through the second fiber.

According to another configuration, the end face is coated with a fluorescent or phosphorescent material, the light source emits light in a first band of wavelengths, such that stimulate the fluorescent or phosphorescent material to emit light in a second band of wavelengths, and the apparatus further includes an optical filter, essentially transmissive of at least one wavelength of the second band and disposed in the path of the light transmitted through the second fiber. According to a modification of this configuration, the second band of wavelengths is different among a plurality of types of the material and the optical filter of a particular apparatus is transmissive of the band corresponding to only one type.

According to further features in the described second configuration, the light source emits light as a first train of pulses and the circuit further includes a synchronous detector that is fed with a multiplying signal formed as a second train of pulses, the two trains of pulses having equal rates and the second train being delayed with respect to the first train.

There is also disclosed herein a method for verifying the proper connection of a tube to a fluid analyzing instrument and for classifying the connected tube, utilizing a system essentially as disclosed herein.

#### BRIEF DESCRIPTION OF THE DRAWINGS

The invention is herein described, by way of example only, with reference to the accompanying drawings, wherein:

FIG. 1 is an illustration of a typical tube connector within a system that is the subject of the present invention;

FIG. 2 is an orthogonal drawing of the connector of Fig. 1, modified according to the present invention;

FIG. 3 is an orthogonal drawing of a connector mating with that of Fig. 2, modified according to the present invention;

FIG. 4 is a schematic block diagram of an electric circuit according to a preferred embodiment of the present invention;



## DESCRIPTION OF THE PREFERRED EMBODIMENTS

The present invention is of a system for detecting the presence of a tube connector at the input of an instrument and for identifying it as belonging to a certain class, so as to affect a  
5 decision process in the instrument.

Specifically, the present invention can be used to verify that an acceptable type of tube assembly has been properly connected to the panel of a capnograph.

The principles and operation of a connector identifier according to the present invention may be better understood with reference to the drawings and the accompanying description.

10 Referring now to the drawings, Figure 2 illustrates the essential part of the female member **10** of the tube connector, modified according to a preferred embodiment of the invention. Basically, this is the standard female connector member (which will be referred to herebelow simply as a connector), as depicted in Fig. 1), typified by a slightly conical inner wall **11**. The modification calls for the annular face **12** of its end (which is the end closest to the  
15 instrument panel) to be specularly reflective to light. The reflectivity may be obtained, for example, by coating the surface with a suitable reflective layer **13** or by polishing the surface to a glossy finish. A preferred method is to hot-press (or stamp) a reflective foil called Foil SLM, available from Kurz Ltd, Germany ; it is particularly suitable when the connector material is made of ABS. As will be seen herebelow, the reflective surface need not extend  
20 over the entire width of end face **12**, but it must form a complete annular ring, since the luer may be connected to the panel in any angular orientation. A female connector with such a reflective annular surface on its end face will be referred to herebelow as a proper connector, and any other connector - as an improper connector.

Fig. 3 shows a face-on view of the essential part of the matching male connector member  
25 **14**, which is mounted on the panel of the analyzing instrument; the central, slightly conical protrusion **16** fits inside the end of female connector **10** of Fig. 2 in such a manner that end face **12** of connector **10** is parallel to, and at a certain distance from, the annular surface **18** of

male connector **14** that surrounds central protrusion **16**. Through the back-plate **19** of male connector **14** there have been drilled two small holes **15**, at a mutual distance of about 1.5 mm center-to-center, so that they form openings that face end face **12**. Inside each hole **15** is mounted, respectively, an end of one of two optical fibers **21** and **22** that run inside the instrument. The fibers are mounted so that their end faces are flush with, or slightly sunk behind, annular face **18** of back-plate **19**.

The other end of fiber **21** is optically coupled to a light-emitting diode (LED) **23**, while the other end of fiber **22** is optically coupled to a photodiode (PD) **24**. Both LED **23** and PD **24** are mounted at a convenient location inside the instrument and are, respectively, connected to electric circuits **25** and **26**. Electric circuit **25** generates a train of current pulses, at a rate of, say, approximately 1 kHz, which are driven through LED **23** and cause it to emit corresponding light pulses. The pulse train frequency is chosen so that this light can be easily discriminated from ambient light, including artificial lighting (which usually has power line frequencies and their harmonics). These light pulses are transmitted through fiber **21** and emitted at its end that is mounted in connector **14**. If a proper female connector **10** is in place, its reflective end face **12** reflects an appreciable portion of the emitted pulsed light into the adjacent end of fiber **22**, which transmits it to PD **24**. This reflected and retransmitted light is detected by PD **24**, which converts it to corresponding current pulses in circuit **26**. It is noted that, according to standards for the dimensions of the connectors, the distance between end face **12** and surface **18** may be between 0.6 and 1.8 mm and this assures proper coupling of light between the fibers by specular reflection off the end face; however, in order to assure that the distance is not less than 0.6 mm, a pair of 0.6 mm spacers **17** are appropriately mounted on surface **18**.

It is appreciated that the LED is provided within a preferred embodiment, but that other types of a light source may be used for coupling to fiber **21**.

Referring now to Fig. 4, circuit **26** includes an amplifier **31**, to whose input PD **24** is connected, followed in order by synchronous detector **32**, integrator **33** and comparator **34**. Amplifier **31** amplifies the pulses induced in PD **24**, then synchronous detector **32** multiplies

them by a synchronous pulse train obtained from circuit 25. The latter operation is advantageously done in order to distinguish between reflected light pulses and any ambient light that may penetrate into fiber 22. The resultant signal is rectified, to produce a direct voltage. This voltage is integrated by integrator 33 over a certain time period - to yield a voltage value, which is compared in comparator 34 with a threshold value, resulting in a binary signal. This signal, which indicates whether or not light pulses have been reflected from fiber 21 into fiber 22 and, therefore - whether the proper connector is properly in place, is applied to other parts of the instrument, to accordingly enable or disable the operation of crucial components, such as the fluid-drawing pump, and to turn a warning, or indicator, light on or off.

The threshold value is chosen to be such that would discriminate between integrated voltage values that result from specular reflection of light pulses from fiber 21 into fiber 22, as effected by end face 12 of a proper female connector 10 (that is, one that has been treated according to the present invention) properly placed, on the one hand, and values that result from diffuse reflection, such as may be effected by the uncoated and untreated end face of any other female connector (which is, therefore, considered to be an improper connector), or from an improperly placed proper connector, on the other hand.

It is appreciated that circuit 25 can also generate current waveforms other than pulses and that circuit 26 can detect resultant signals in a manner similar to that described hereabove or in any other manner known in the art. According to a refinement of the apparatus disclosed herein, there is placed an optical filter, which selectively transmits the band of wavelengths emitted by LED 23, either in front of fiber 22 within corresponding hole 15, or between fiber 22 and PD 24; this filter is further instrumental in distinguishing between reflected light and ambient light.

According to an alternative configuration of the present invention, the reflective coating on end face 12 of female connector 10 is made to be spectrally selective, that is, it is made to reflect light of certain wavelengths or within a certain bandwidth. This can be achieved, for example, by having the reflective material itself contain dyes or pigments, or by coating the

reflective layer with a suitable spectral filter. This configuration may be advantageously applied, for example, to discriminate between several subclasses of tube assemblies and matching each subclass to a corresponding type of analyzing instrument. For such an application, each type of instrument is provided with a light source having a unique spectral characteristic and the reflection spectrum of each subclass of the tube assembly is made to match. Alternatively, the spectral bandwidth of the light source is broad and identical in all the types of instruments, but a filter in the path of the reflected light (as described above) is given a unique spectral characteristic; according to one practical embodiment, this filter may be identical to the one placed over the reflective surface of the end face (as suggested above).

According to another alternative configuration of the present invention, end face **12** of female connector **10** is coated with a fluorescent or phosphorescent material, which is not necessarily specularly reflective. LED **23** is of a type that emits wavelengths short enough to stimulate fluorescence or phosphorescence in the material. There is placed an optical filter either in front of fiber **22** within corresponding hole **15**, or between fiber **22** and PD **24**. The optical filter selectively transmits the strongest wavelengths emitted by the fluorescent or phosphorescent material, while substantially attenuating wavelengths emitted by LED **23**. The rest of the apparatus is as described hereabove. Although this configuration involves generally higher costs for treating the end of the connector than does the first configuration, it has two advantages:

- (a) There is a high degree of discrimination between light reflected from a proper connector and light reflected from any other connector, since the optical filter can be made to greatly attenuate the wavelength band emitted by LED **23** (which is the only band present in light reflected by improper connectors).
- (b) Different types of fluorescent or phosphorescent materials, having different spectral emission characteristics (or spectral profile), can be chosen; these can be assigned to different classes of connectors for discrimination therebetween.

The second advantage can be realized, for example, by choosing for a particular instrument an optical filter such that transmits one or more wavelengths at which the

corresponding type of material emits strongly or strongest, while substantially attenuating those wavelengths at which all other types strongly emit. By properly adjusting the threshold level, this would result in an enabling signal being output by the comparator only when a connector of the corresponding class is properly connected to the instrument.

- 5       The fluorescent or phosphorescent material, rather than coated, or painted on the end face, may also be imbedded in the material of which the end face (or the entire connector) is formed. Another way of applying it to the end face is to bond or stamp (e.g. by hot-pressing) to the end face a foil or a film that contains such fluorescent or phosphorescent material.

- According to a refinement of the alternative configuration, applicable in the case of  
10   phosphorescent materials, there is introduced a certain time delay between the train of current pulses applied to LED **23** and the synchronous pulse train obtained from circuit **25** and applied to the multiplier in circuit **26**. The delay time is just greater than the duration of a pulse. The effect of the delay is that the detected light is only that which is emitted by the phosphorescence, excluding, in particular, directly reflected light. This feature further helps  
15   to discriminate between a proper connector and any other connector and may be used in addition to, or alternatively to, the above mentioned optical filter.

While the invention has been described with respect to a limited number of embodiments, it will be appreciated that many variations, modifications and other applications of the invention may be made.

WHAT IS CLAIMED IS:

1. Apparatus for analyzing fluid supplied to it through a tube, comprising:
  - (a) an analyzing instrument within an enclosure;
  - (b) a first connector attached to the tube and having an end face;
  - (c) a second connector, mating with said first connector and attached to said enclosure;
  - (d) a pair of optical fibers disposed inside said enclosure, a first end of each of said fibers being mounted in said second connector so that, when said first connector is properly mated with said second connector, there is a clear optical path between the end face of each of said first ends of said fibers and at least one common point on said end face;
  - (e) a light source optically coupled to the second end of a first one of said pair of fibers; and
  - (f) a light detector optically coupled to the second end of the second one of said pair of fibers.
2. The apparatus of claim 1, wherein said end face is characterized by essentially specular reflectivity over at least an annular portion thereof that, when said first connector is properly mated with said second connector in any angular orientation, includes all possible ones of said at least one common point.
3. The apparatus of claim 2, wherein said analyzing instrument or any components thereof are operative only upon reception of an enabling signal and further comprising an electric circuit connected to said light detector, said circuit being configured so that only if a substantial portion of any light emitted from said first end of one of said fibers is reflected by said annular portion of said end face into said first end of the other one of said fibers, will said circuit output said enabling signal to said analyzing instrument.
4. The apparatus of claim 1, wherein said light source emits light in an essentially narrow band of wavelengths and further comprising an optical filter, essentially transmissive

to said band of wavelengths and disposed in the path of the light transmitted through said second one of said pair of fibers.

5. The apparatus of claim 1, wherein said end face is coated with a fluorescent or phosphorescent material over at least an annular portion thereof that, when said first connector is properly mated with said second connector in any angular orientation, includes all possible ones of said at least one common points.

6. The apparatus of claim 5, wherein said light source emits light in a first band of wavelengths, such that stimulate said fluorescent or phosphorescent material to emit light in a second band of wavelengths, and further comprising an optical filter, essentially transmissive to at least one wavelength of said second band and disposed in the path of the light transmitted through said second one of said pair of fibers.

7. The apparatus of claim 6, wherein said fluorescent or phosphorescent material is one of a plurality of types, characterized in that said second band of wavelengths has a spectral profile essentially different among said plurality of types, and wherein said optical filter is essentially transmissive to one or more wavelengths at which said one of said plurality of types emits strongly and substantially attenuative to wavelengths at which any other of said types emits strongest.

8. The apparatus of claim 5, wherein said analyzing instrument or any components thereof are operative only upon reception of an enabling signal and further comprising an electric circuit connected to said light detector, said circuit being configured so that only if a substantial portion of any light emitted from said fluorescent or phosphorescent material is collected by said first end of said second one of said fibers, will said circuit output said enabling signal to said analyzing instrument.

9. The apparatus of claim 8, wherein said light source emits light as a first train of pulses and said circuit further includes a synchronous detector that is fed with a multiplying signal formed as a second train of pulses, the two trains of pulses having equal rates and said second train being delayed with respect to said first train.

10. The apparatus of claim 1, wherein said light source emits light in pulses.

11. A system for verifying the proper connection of a tube assembly to a fluid analyzing instrument and for classifying the connected tube assembly, the connection being effected by means of a first connector, which is part of the tube assembly and has an end face, and a second connector, mating with the first connector and attached to an enclosure that encloses the analyzing instrument, the system comprising:

- (a) a pair of optical fibers disposed inside the enclosure, a first end of each of said fibers being mounted in the second connector so that, when the first connector is properly mated with the second connector, there is a clear optical path between the end face of each of said first ends of said fibers and at least one common point on the end face;
- (b) a light source optically coupled to the second end of a first one of said pair of fibers; and
- (c) a light detector optically coupled to the second end of the second one of said pair of fibers.

12. The system of claim 11, wherein the end face is made to have essentially specular reflectivity over at least an annular portion thereof that, when the first connector is properly mated with the second connector in any angular orientation, includes all possible ones of said at least one common point.

13. The system of claim 12, further comprising an electric circuit connected to said light detector, said circuit being configured so that only if a substantial portion of any light emitted from said first end of one of said fibers is reflected by said annular portion of the end face



into said first end of the other one of said fibers, will said circuit output an enabling signal to the analyzing instrument.

14. The system of claim 11, further comprising an optical filter, transmissive to an essentially narrow band of wavelengths and disposed in the path of the light transmitted through said second one of said pair of fibers.

15. The system of claim 11, wherein the end face is coated with a fluorescent or phosphorescent material over at least an annular portion thereof that, when the first connector is properly mated with the second connector in any angular orientation, includes all possible ones of said at least one common points.

16. The system of claim 15, wherein said light source emits light in a first band of wavelengths, such that stimulate said fluorescent or phosphorescent material to emit light in a second band of wavelengths, and further comprising an optical filter, essentially transmissive to at least one wavelength of said second band and disposed in the path of the light transmitted through said second one of said pair of fibers.

17. The system of claim 16, wherein said fluorescent or phosphorescent material is one of a plurality of types, characterized in that said second band of wavelengths has a spectral profile essentially different among said plurality of types, and wherein said optical filter is essentially transmissive to one or more wavelengths at which said one of said plurality of types emits strongly and substantially attenuative to wavelengths at which any other of said types emits strongest.

18. The system of claim 15, wherein the analyzing instrument or any components thereof are operative only upon reception of an enabling signal and further comprising an electric circuit connected to said light detector, said circuit being configured so that only if a substantial portion of any light emitted from said fluorescent or phosphorescent material is

collected by said first end of said second one of said fibers, will said circuit output the enabling signal to the analyzing instrument.

19. The system of claim 18, wherein said light source emits light as a first train of pulses and said circuit further includes a synchronous detector that is fed with a multiplying signal formed as a second train of pulses, the two trains of pulses having equal rates and said second train being delayed with respect to said first train.

20. The system of claim 11, wherein said light source emits light in pulses.

21. A method for verifying the proper connection of a tube to a fluid analyzing instrument and for classifying the connected tube, the connection being effected by means of a first connector attached to the tube and having an end face and a second connector, mating with the first connector and attached to an enclosure that encloses the analyzing instrument, the method comprising the steps of:

- (a) providing a pair of optical fibers disposed inside the enclosure, a first end of each of said fibers being mounted in the second connector so that, when the first connector is properly mated with the second connector, there is a clear optical path between the end face of each of said first ends of said fibers and at least one common point on the end face;
- (b) providing a light source optically coupled to the second end of a first one of said pair of fibers; and
- (c) providing a light detector optically coupled to the second end of the second one of said pair of fibers.

22. The method of claim 1, further comprising the step of making the end face have essentially specular reflectivity over at least an annular portion thereof that, when the first connector is properly mated with the second connector in any angular orientation, includes all possible ones of said at least one common point.

23. The method of claim 22, further comprising the step of providing an electric circuit connected to said light detector, said circuit being configured so that only if a substantial portion of any light emitted from said first end of one of said fibers is reflected by said annular portion of the end face into said first end of the other one of said fibers, will said circuit output the enabling signal to the analyzing instrument.

24. The method of claim 21, further comprising the step of providing an optical filter, transmissive to an essentially narrow band of wavelengths and disposed in the path of the light transmitted through said second one of said pair of fibers.

25. The method of claim 21, whereby the end face is coated with a fluorescent or phosphorescent material over at least an annular portion thereof that, when the first connector is properly mated with the second connector in any angular orientation, includes all possible ones of said at least one common points.

26. The method of claim 25, whereby said light source is made to emit light in a first band of wavelengths, such that stimulate said fluorescent or phosphorescent material to emit light in a second band of wavelengths, and further comprising the step of providing an optical filter, essentially transmissive to at least one wavelength of said second band and disposed in the path of the light transmitted through said second one of said pair of fibers.

27. The method of claim 26, whereby said fluorescent or phosphorescent material is chosen to be one of a plurality of types, characterized in that said second band of wavelengths has a spectral profile essentially different among said plurality of types, and whereby said optical filter is made to be essentially transmissive to one or more wavelengths at which said one of said plurality of types emits strongly and substantially attenuative to wavelengths at which any other of said types emits strongest.

28. The method of claim 25, further comprising the step of providing an electric circuit connected to said light detector, said circuit being configured so that only if a substantial portion of any light emitted from said fluorescent or phosphorescent material is collected by said first end of said second one of said fibers, will said circuit output the enabling signal to the analyzing instrument.

29. The method of claim 28, whereby said light source is made to emit light as a first train of pulses, said circuit is made to include a synchronous detector and said synchronous detector is fed with a multiplying signal formed as a second train of pulses, the two trains of pulses having equal rates and said second train being delayed with respect to said first train.

30. The method of claim 21, whereby said light source is made to emit light in pulses.

31. ~ A tube assembly for connection to a fluid analyzing instrument, comprising a connector having an end face, wherein said end face is formed to have essentially specular reflectivity over at least an annular portion thereof.

32. ~ A tube assembly for connection to a fluid analyzing instrument, comprising a connector having an end face, wherein said end face has a fluorescent or phosphorescent material over at least an annular portion thereof.

33. The tube assembly of claim 32, wherein said fluorescent or phosphorescent material is any one of a plurality of types, characterized by different spectra of emission.

34. The tube assembly of claim 31, wherein said formed includes hot-pressed or stamped with a reflective foil.

35. The tube assembly of claim 31, wherein said formed includes coated or painted with reflective material.

36. The tube assembly of claim 31, wherein said formed includes having a reflective object bonded to said end face.
37. The tube assembly of claim 32, wherein said fluorescent or phosphorescent material is coated or painted on said end face.
38. The tube assembly of claim 32, wherein said fluorescent or phosphorescent material is on an object bonded to, or stamped onto, said end face.
39. The tube assembly of claim 32, wherein said fluorescent or phosphorescent material is imbedded in said end face.
40. The tube assembly of claim 31, wherein said reflectivity is spectrally selective.
41. The tube assembly of claim 31, further comprising an optical filter having spectrally selective transmission and disposed over at least said annular portion.
42. The apparatus of claim 2, wherein said specular reflectivity is spectrally selective.
43. The apparatus of claim 42, wherein said light source emits light in a narrow band of wavelengths.
44. The apparatus of claim 42, further comprising an optical filter having a spectrally selective transmission and disposed in the path of the light transmitted through said second one of said pair of fibers.
45. The system of claim 12, wherein said specular reflectivity is spectrally selective.

46. The system of claim 45, wherein said light source emits light in a narrow band of wavelengths.

47. The system of claim 45, further comprising an optical filter having a spectrally selective transmission and disposed in the path of the light transmitted through said second one of said pair of fibers.

48. The method of claim 22, whereby said specular reflectivity is made to be spectrally selective.

49. The method of claim 48, whereby said light source is made to emit light in a narrow band of wavelengths.


50. The method of claim 48, further comprising the step of providing an optical filter having a spectrally selective transmission and disposing it in the path of the light transmitted through said second one of said pair of fibers.

## ABSTRACT OF THE DISCLOSURE

Apparatus for analyzing fluid supplied to it through a tube, comprising an analyzing instrument within an enclosure, a first connector attached to the tube and having an end face, a second connector, mating with the first connector and attached to the enclosure, a pair of optical fibers disposed inside the enclosure, a first end of each of the fibers is mounted in the second connector, there is a clear optical path between the end face of each of the first ends of the fibers and at least one common point on the end face. A light source is optically coupled to the second end of a first one of the pair of fibers, and a light detector optically coupled to the second end of the second one of the pair of fibers.

46347-CTT-9630

Figure 1

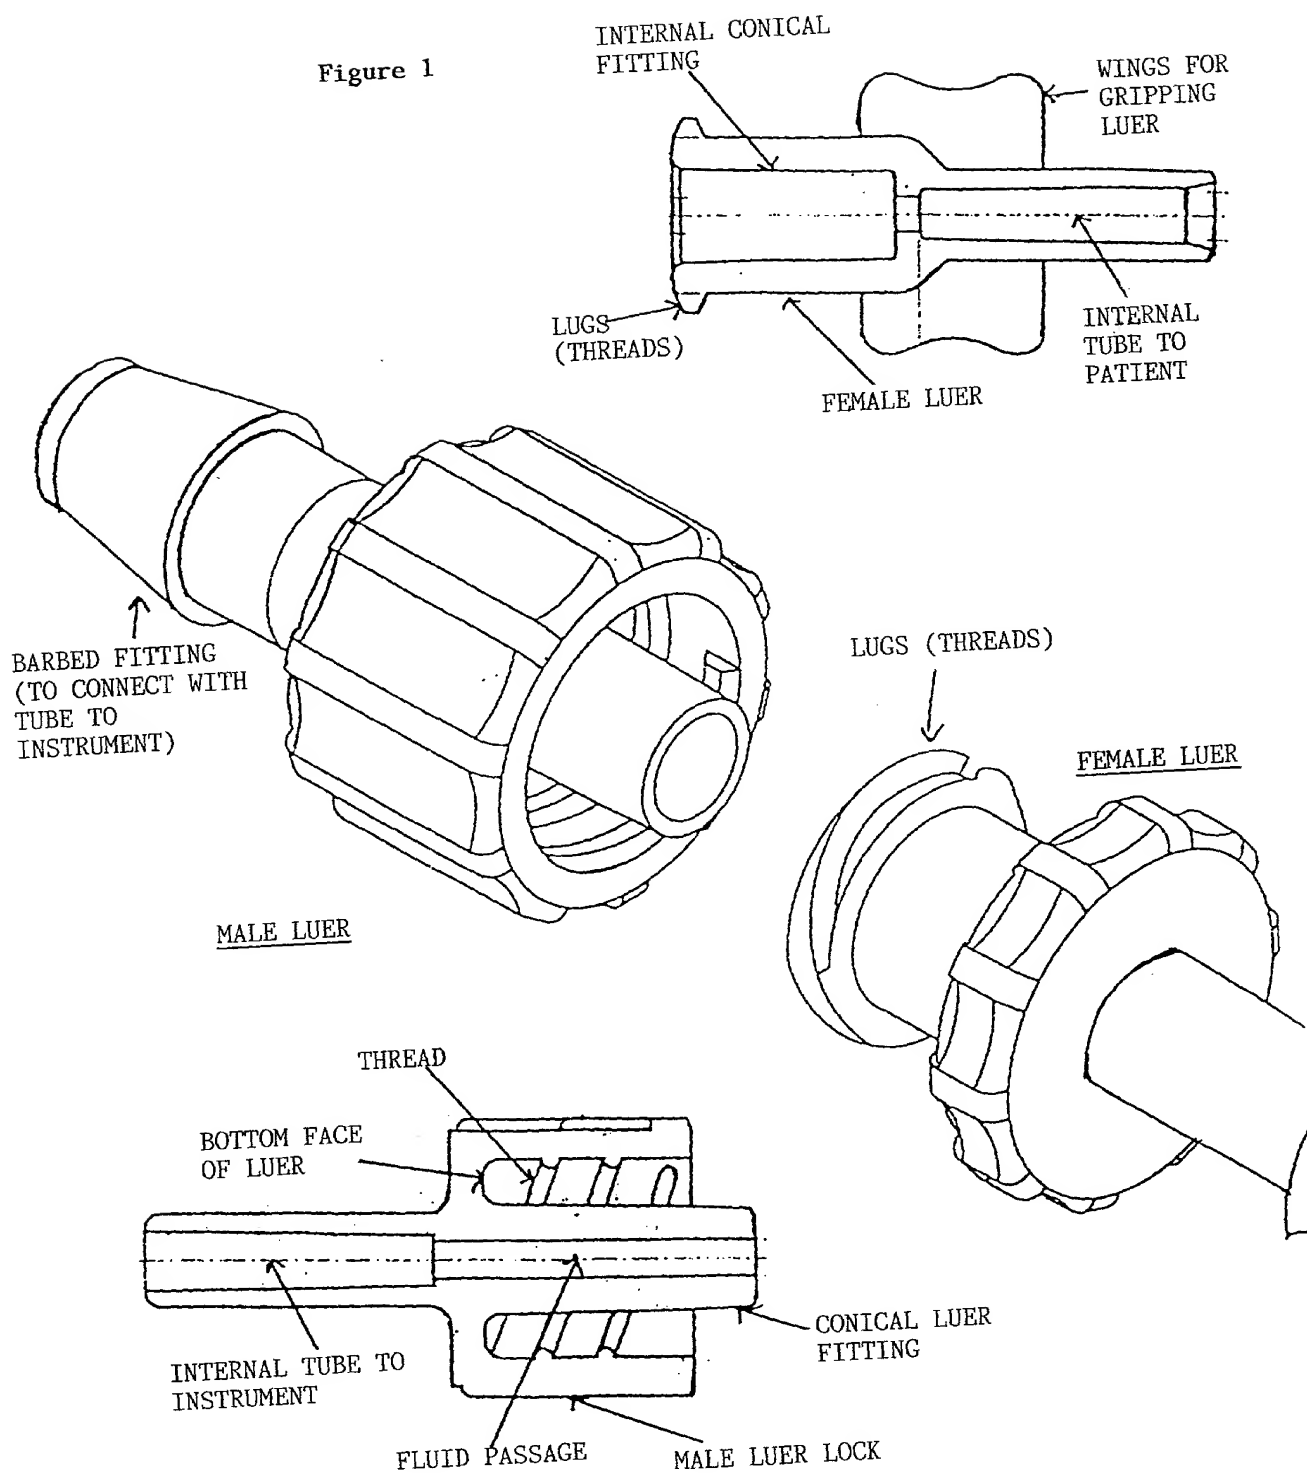



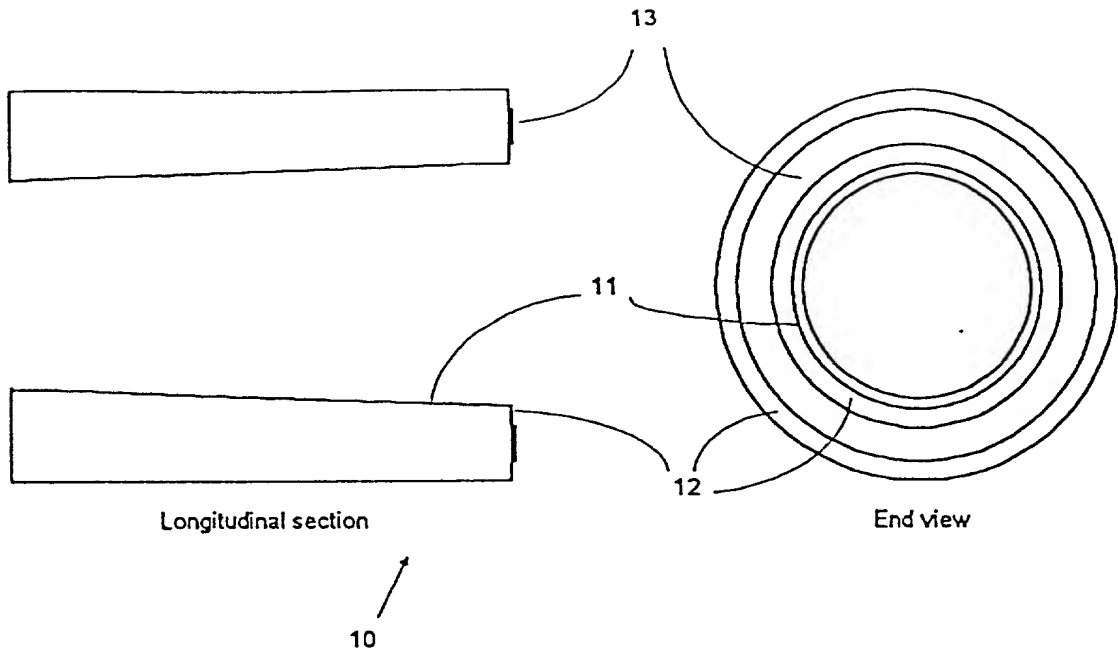


Figure 2

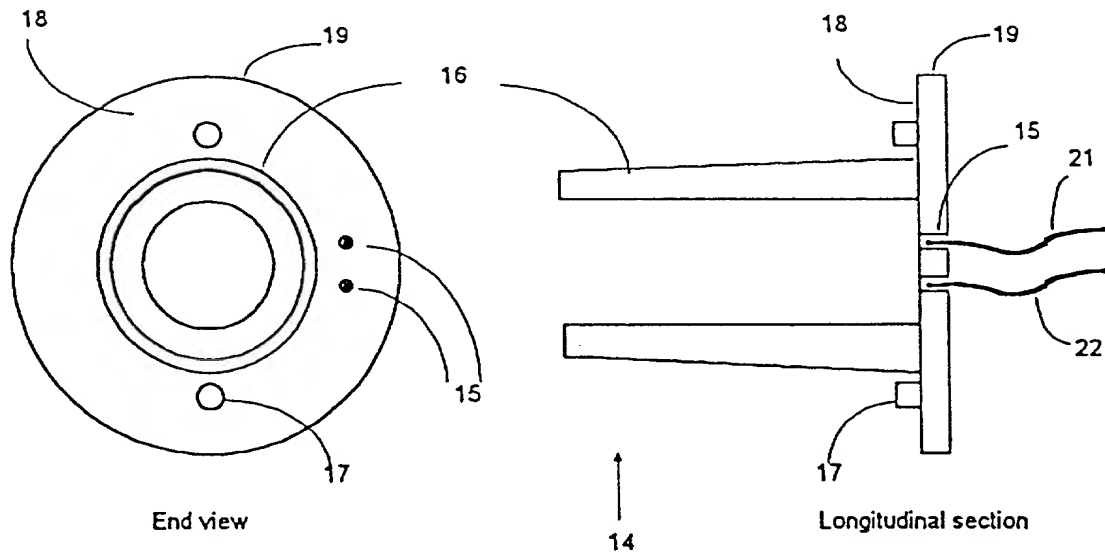


Figure 3

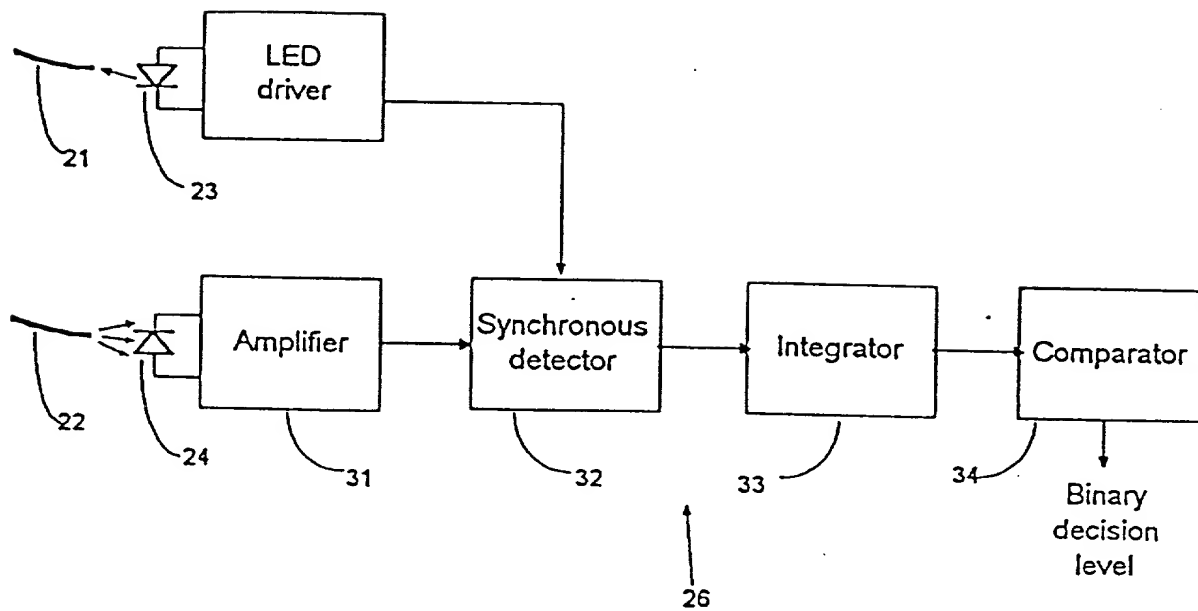


Figure 4

Attorney Docket: 830/17

## Combined Declaration For Patent Application and Power of Attorney

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name;  
 I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled FLUID ANALYZER WITH TUBE CONNECTOR VERIFIER, the specification of which (check one) X is attached hereto.

       was filed on        as Application Serial No.        and was amended on         
 I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to the examination of this application in accordance with Title 37, Code of Federal Regulations, § 1.56(a).

I hereby claim foreign priority benefits under Title 35, United States Code, § 119 of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having filing date before that of the application on which priority is claimed:

Prior Foreign Application(s)		4 NOV 1996	Priority Claimed	
119562	IL		X	
(number)	(Country)	(Day, Month, Year Filed)	Yes	No
			Yes	No
			Yes	No
			Yes	No

I hereby claim the benefit under Title 35, United States Code, § 120 of any United States Application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code, § 112, I acknowledge the duty to disclose material information as defined in Title 37, Code of Federal Regulations, § 1.56(a) which occurred between the filing date of the prior application and the national or PCT international filing date of this application:

NONE			
(Application Serial No.)	(Filing Date)	Status	
		(patented, pending, abandoned)	

I hereby appoint the following attorneys, with full power of substitution, association, and revocation, to prosecute this application and to transact all business in the Patent and Trademark Office connected therewith.

Mark M. Friedman Registration No. 33,883

Address all Correspondence to:

DR. MARK FRIEDMAN & CO.  
 c/o ROBERT SHEINBEIN  
 2940 BIRCHTREE LANE  
 SILVER SPRING, MARYLAND 20906

Direct all telephone calls & faxes to:  
 ROBERT SHEINBEIN  
 Phone (301) 996-3558  
 Fax (301) 871-1631

I hereby further declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statement may jeopardize the validity of the application of any patent issued thereon.

*FULL NAME OF SOLE OR FIRST INVENTOR JOSHUA L. COLMAN	INVENTOR'S SIGNATURE 	DATE 14/10/97
RESIDENCE 22/6 KEHILAT YA'ACOV, RAMAT SHLOMO, JERUSALEM	CITIZENSHIP	
POST OFFICE ADDRESS 22/6 KEHILAT YA'ACOV, RAMAT SHLOMO, JERUSALEM		
*FULL NAME OF SECOND INVENTOR AMNON MENACHEM	INVENTOR'S SIGNATURE 	DATE 14/10/97
RESIDENCE 36 KEDOSHEI STROMA, MALHA, JERUSALEM, ISRAEL	CITIZENSHIP ISRAELI	
POST OFFICE ADDRESS 36 KEDOSHEI STROMA, MALHA, JERUSALEM, ISRAEL		
*FULL NAME OF THIRD INVENTOR	INVENTOR'S SIGNATURE	DATE
RESIDENCE	CITIZENSHIP	
POST OFFICE ADDRESS		